


WOODEN CENTRE-PIVOT ROOF WINDOWS

COMFORT_{BH}, TERMO V_{BH}, TERMO_{BH}, TERMO

- ▶ The hinge is placed in the middle of the frame and allows the sash to be tilted to any angle for ventilation or rotated by 180°.
- ▶ The bolt locks the window open at an angle of 20°, protecting it against unwanted opening e.g. by children or the wind. It also allows the window to be secure when rotated by 180° for easy cleaning of the exterior glass.
- ▶ COMFORT_{BH} windows are equipped with the unique automatic air inlet VENTAIR MAGNETIC, it is fitted inside the top part of the frame, it does not reduce the glazing area.
- ▶ TERMO V_{BH} windows are equipped with the manual air inlet SLOT-AIR, it is fitted inside the top part of the sash, it does not reduce the glazing area.
- ▶ The windows are double glazed with sealed units filled with Argon gas and with low emission glass on the inner skin achieving a U value of $U = 1.1 \text{ W/m}^2\text{K}$ EN673 ($U = 1.0 \text{ W/m}^2\text{K}$ EN674)
- ▶ The external glass in COMFORT_{BH}, TERMO V_{BH}, TERMO_{BH} window is toughened and self-cleaning glass.
- ▶ Windows are made of top-quality pinewood bonded in layers, protected with an impregnating agent and coated with a colourless finish lacquer.
- ▶ On the exterior, the wood is shielded with weather-resistant aluminium profiles coated with grey polyester.
- ▶ The window variations are available in 11 standard sizes.
The windows and flashings can be installed on roofs with pitches between 20° to 90°.

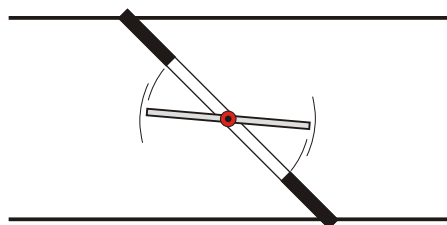

01 0,23m ²				Nr okna pow. przeszklenia	
02 0,30m ²		03 0,40m ²	05 0,48m ²		
04 0,49m ²		06 0,61m ²	08 0,76m ²	10 0,96m ²	
		07 0,74m ²	09 0,94m ²		
		13 0,86m ²			
550 mm		660 mm	780 mm	940 mm	1140 mm
				780 mm	980 mm
				1180 mm	1400 mm
				1600 mm	

OP PLUS _{BH} , OPH
OC _{BH}
OTV _{BH}
OT _{BH} , OT
OT PVC _{BH}

CENTRE-PIVOT PVC ROOF WINDOW

Centre-pivot roof window made from PVC **TERMO PVC_{BH} (OTP_{BH}):**

- ▶ The hinge is placed in the middle of the frame and allows the sash to be tilted to any angle for ventilation or rotated by 180° for easy cleaning of the exterior glass
- ▶ The handle is positioned on the lower part of the window, making it easy to use. The handle enables three point closing with micro ventilation.
- ▶ The windows are double glazed with sealed units filled with Argon gas and with low emission glass on the inner skin achieving a U value of $U = 1.1 \text{ W/m}^2\text{K}$ EN673 ($U = 1.0 \text{ W/m}^2\text{K}$ EN674)
- ▶ The external glass in TERMO PVC_{BH} window is toughened and self-cleaning glass.
- ▶ **Frames and sashes are manufactured from lead-free, multi-chamber, steel re-enforced profiles PVC (white)**
- ▶ **Does not required repainting.**
- ▶ **Maintenance free**